



1961-1969 Jaguar E-Type Series 1 & 1.5

Front LED Installation instructions

Part # 1-090 -f 1-091 +f

- 1) We suggest that you evaluate the condition of the turn signal lens gaskets and if necessary order new ones before starting installation. Note: These LED lights are designed to function as both Side marker (running lights and turn indicator/signals).
- 2) Remove the turn signal lens and bulb. Retain the small parking light bulb in its socket. Disconnect the turn signal wire to the larger bulb holder. Push this wire out through the lens side of the turn signal. Save these in case you want to restore the turn signals to their original state.
- 3) Remove the double sided tape protective plastic (usually red plastic covers) from the back side of one of the circuit boards.
- 4) Insert the wires from the circuit board in through the bulb socket. The curved end of the circuit board is inserted inside the reflector while the square end faces the outside of the reflector, much like the rear boards. Push this curved part of the circuit board into the curved portion of the turn indicator signal metal relector/socket. With your fingers, press the board down somewhat firmly for about 20 seconds to insure good adhesion with the double sided tape. It is best to do this when the socket has been cleaned and is above 65°F (18°C) to see that long term adhesion is attainable. You may elect to add a ½" of clear silicon adhesive or hot melt glue to each corner (or side) for extra holding power.
- 5) The red wire is for the optional running light function. We think it is a safety feature and recommend its use where authority allows. If not used, the red wire may be removed (cut off) or taped off it to prevent shorting the circuit board. Refer to the wiring diagram below for proper wiring.
- 7) Install the lens and gasket, then repeat for the other side of the car.



NOTE: See LED Flasher Options page for information about turn signal flashers and LEDs.

Parts List:

	Description	Qty.
1	Double bullet connector	2
2	Park/Turn Signal circuit boards	2




Jaguar E-Type SI/II/III Wiring Diagram for Classic Auto LEDs Turn Indicator Board Set

RED - For Sidelights/Parking

GREEN/WHITE TRACER
For Right Turn Indicator

NOTE: Optional LED Load Resistors shown connected to turn indicator wires. We recommend First using a turn signal flasher with an Earth wire (or additional terminal for ground) which can be ordered through us or alternate suppliers.

N. American Passengers Side

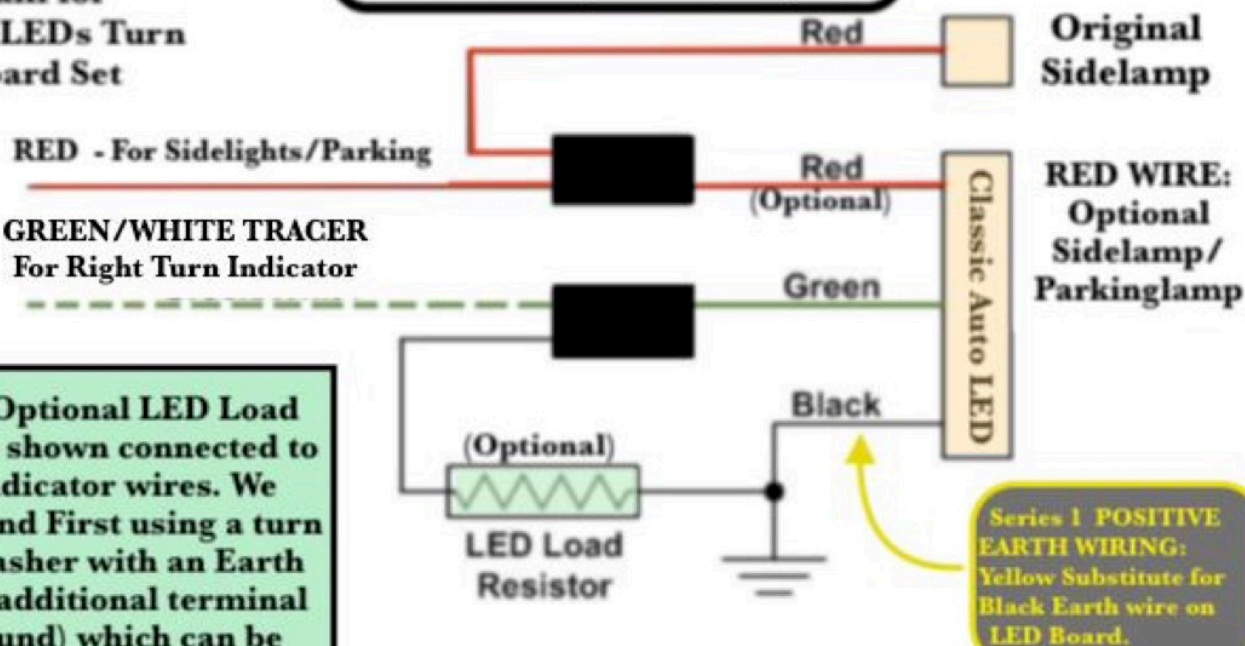

N. American Drivers Side

